



MULTI-ROOM® / HYBRID

ELEGANCE



MORETTI
DESIGN
WI-FI

L'interfaccia che permette la gestione remota tramite SMARTPHONE di ultima generazione.

Interface that allows remote management by SMARTPHONE.

Gestion de l'appareil depuis un SMARTPHONE de dernière génération.

Interfaz que permite la gestión remota a través SMARTPHONE de última generación.

Modul, Schnittstelle, die Remote-Management via SMARTPHONE der letzten Generation ermöglicht.



FIREWALL

Il FIREWALL è un materiale speciale adottato dalla moretti design per la realizzazione della camera di combustione.

FIREWALL is a special material used by moretti design for the construction of the combustion chamber.

Le FIREWALL est un matériau spécial utilisé par MORETTIDESIGN pour la construction de la chambre de combustion.

El FIREWALL es de un material especial adoptado por moretti design para la construcción de la cámara de combustión.

FIREWALL ist ein spezielles Material, das von moretti design für den Bau der Brennkammer verwendet wird.



ASH
DRAWER

Cassetto per la raccolta delle ceneri.

The heat exchanger is automatically cleaned.

Cendrier.

Cajón cenicero.

Ausziehbare Aschelade.



MAGICAL
GLASS

Consente la visione della camera di combustione solo a fiamma accesa.

It allows the view of combustion chamber only when the flame is lit.

Il permet de visualiser la chambre de combustion uniquement lorsque la flamme est allumée.


Permite ver la cámara de combustión solo con la llama encendida.

Glas ermöglicht die Betrachtung der Brennkammer nur bei brennender Flamme.

TECHNOLOGY



OPTIONAL

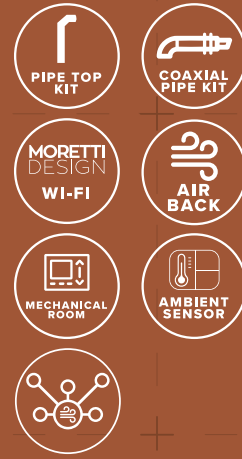

MULTI-ROOM® / HYBRID

ELEGANCE

	Potenza Globale Global Power Pulsance globale Potencia global Verbrennungsleistung	Potenza Nominale Nominal Power Pulsance Nominale Potencia Nominal Nennleistung	Rendimento totale Total efficiency Pulsance globale Potencia global Pellet Wirkungsgrad	Peso Weight Poids Peso Gewicht	Consumo min-MAX Min-Max consumption Consumation min-MAX Consumo min-max Min-Maxi-verbrauch	Temperatura gas di scarico Exhaust gas temperature Température des gaz d'échappement Temperatura de los gases de escape Abgastemperatur	Tiraggio richiesto in funzionamento Draw required in operation Dessiner nécessaire en fonctionnement Dibujar requerido en la operación Erforderlicher Betriebszug	Uscita fumi Chimney Output Sortie conduit de cheminée Salida conductor de humos Rauchauslass	Ingresso aria Air intel Entrée d'air Entrada aire Lufteinlass	Serbatoio pellet Pellet tank Réservoir Deposito Tank, Fassungsvermögen	Assorbimento elettrico watt Electric consumption watt Absorption électrique watt Consumo de electricidad watt Elektrischer Verbrauch watt
	KW	KW	%	KG	KG/H	°C	PA	MM	MM	KG	W
14 kw	14,0	12,7-3,0	90,6	155	0,65-2,92	182	3	80	60	22	M270-N93-R45
12 kw	12,6	11,0-3,1	88,0	155	0,7-2,6	217	3	80	60	22	M270-N91-R45
10 kw	10,1	9,0-3,1	88,0	155	0,7-2,0	189	3	80	60	22	M270-N89-R45

